




Contribute to the world's new energy

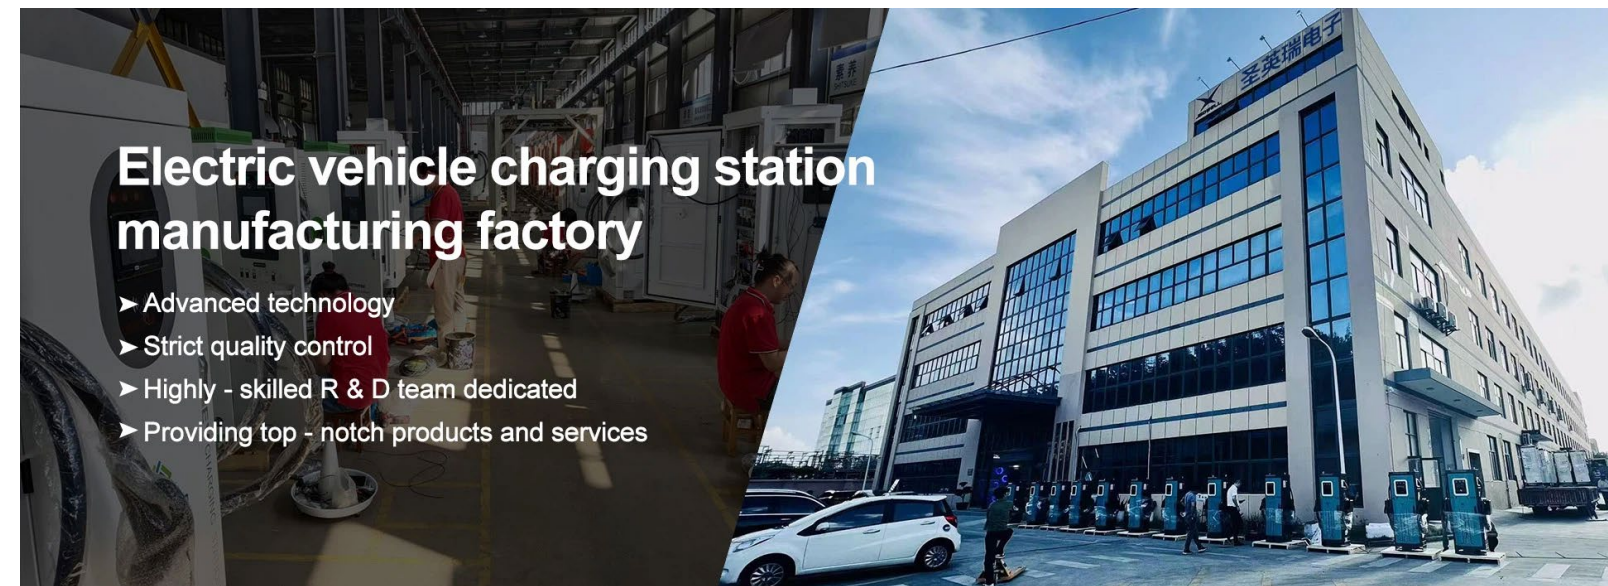

## Electric vehicle charging station manufacturing factory

- ▶ Advanced technology
- ▶ Strict quality control
- ▶ Highly - skilled R & D team dedicated
- ▶ Providing top - notch products and services

### ZHEJIANG SINRAY ELECTRONICS CO.,LTD.

Address: CHUANGYE ROAD, NANHU DISTRICT, JIAXING CITY,ZHEJIANG CHINA

Phone:0573-82320485

Http:[www.jxkyelectronics.com](http://www.jxkyelectronics.com) [www.sinrayevcharger.com](http://www.sinrayevcharger.com)

Mailbox: [sinray@jxkye.com](mailto:sinray@jxkye.com)

ZHEJIANG SINRAY ELECTRONICS CO. , LTD.



# COMPANY INTRODUCTION

ZHEJIANG SINRAY ELECTRONICS co.,LTD is committed to the research, development, production and sales of new energy charging station products. Provide smart charging system solutions based on various scenarios.

Products include portable charging boxes, AC charging station, DC charging station, energy gate-ways, cloud platforms, charging operation management systems etc.

We can quickly respond to customer needs and provide integrated customized services of hardware and software systems. The products adopt top-level components and high-quality supply chain to ensure the ultra-high quality and performance of the products.



# CONTENTS

## New energy charging station series products

### 01 AC CHARGING SERIES

3.5KW/7KW .....	03
7kW/32A 11kW/ 16A 22kW/32A .....	04

### 02 DC CHARGING SERIES

DC-15KW - 30KW .....	05
DC-20KW DC-30KW DC-40KW .....	06
DC 40KW-240KW .....	07

# 3.5KW/7KW AC portable charger



- Class A flame retardant rating
- IP65 protection level
- Appointment time function
- LCD screen
- Adjustment amperes
- CEE socket is optional
- Short circuit and electric shock protection function



J1772(Type1) J1772(Type1) Mennekes(Type2) GB/T



### Product parameter

Item	Details
Power	3.5kw/7kw
Rated Voltage	AC 220V±20%
Frequency	50±5Hz
Output Power Rating	3.5kw/7kw
Output Current	0-16A,0-32A
Cable Length	5m
Charging method	Plug and play
Connector Type	Type 1,Type 2,GB/T
Protection Level	IP65
Operating Temperature	~-30C to +60C
Product size	220*84*50mm
Package size	350*350*120mm(6pcs)
net weight	2.8KG(1pcs)
gross weigh	3.0KG(1pcs)

# 7kW/32A 11kW/ 16A 22kW/32A



- Class A flame retardant rating
- IP54 protection level
- RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP
- 4.3 inch touch screen
- Home use or commercial use is optional
- Six types of safety protection systems



CCS1 CHAdeMO CCS2 GB/T



### Product parameter

Item	Details
Power	AC 7KW/11KW/22kW
Rated Voltage	AC 230V/400V±20%
Frequency	50-60Hz
Output Voltage	7KW/11KW/22kW
Output Current	32/16/32A
Cable Length	5m
Charging method	RFID/Plug and play/WIFI/4G/APP
Connector Type	Type 1,Type 2
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	179.5*421*145.5
Package size	250*480*180
net weight	4KG
gross weigh	5KG

# DC-15KW - 30KW Portable DC charger



- Military grade materials
- IP54 protection level
- RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP
- 4.3 inch touch screen
- Home use or commercial use is optional
- Eight types of safety protection systems
- CEE/type2/socket input way



## Product parameter

Item	Details
Power	DC 15KW-30KW
Input Voltage	AC(380V±20% 3 Phase -
Rated output voltage	DC50-550V
Frequency	50-60Hz
HMI	5- Inch touch screen
Cable Length	3m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHAdeMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	530*320*200
Package size	700*500*570
net weight	33.5KG
gross weigh	48.5KG

# DC-20KW DC-30KW DC-40KW wallbox



- Military grade materials
- IP54 protection level
- RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP
- 7 inch touch screen
- Home use or commercial use is optional
- Eight types of safety protection systems
- Wall mounted or floor mounted is optional



## Product parameter

Item	Details
Power	DC 20KW/30KW/40KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC200-750V DC50-1000V
Frequency	50-60Hz
Communication Protocol	OCPP/RFID
Cable Length	5m
Charging method	4G/Ethernet/RFID/ etc
Connector Type	CCS1/CCS2/CHAdeMO/GBT
Protection Level	IP54
Communication Protocol	OCPP 1.6J
Operating Temperature	~-30C to +60C
Product size	480*230*670
Package size	860*710*480
net weight	50/53/57KG
gross weigh	80/83/87KG

# DC 40KW-320KW double guns



- Military grade materials
- IP54 protection level
- RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP
- 7 inch touch screen
- Home use or commercial use is optional
- Eight types of safety protection systems
- Floor mounted



## Product parameter

Item	Details
Power	DC 40KW-320KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	650*620*1700
Package size	1100*900*2000
net weight	250KG
gross weigh	290KG

# DC 40KW-400KW double guns



- Military grade materials
- IP54 protection level
- RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP
- 7 inch touch screen
- Home use or commercial use is optional
- Eight types of safety protection systems
- Floor mounted



## Product parameter

Item	Details
Power	DC 40KW-400KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	800*720*1900
Package size	1070×670×1820
net weight	250KG
gross weigh	300KG

# DC40KW-60KW double guns



Military grade materials  
IP54 protection level  
RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP  
7 inch touch screen  
Home use or commercial use is optional  
Eight types of safety protection systems  
Floor mounted



## Product parameter

Item	Details
Power	DC40KW-60KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	650*360*1450
Package size	900*440*1600
net weight	120KG
gross weigh	160KG

# DC 40KW-400KW double guns



Military grade materials  
IP54 protection level  
RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP  
7 inch touch screen  
Home use or commercial use is optional  
Eight types of safety protection systems  
Floor mounted



## Product parameter

Item	Details
Power	DC 40KW-400KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	700*500*1650
Package size	1150*900*2000
net weight	250KG
gross weigh	290KG

# DC 40KW-240KW double guns



Military grade materials  
IP54 protection level  
RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP  
7 inch touch screen  
Home use or commercial use is optional  
Eight types of safety protection systems  
Floor mounted



## Product parameter

Item	Details
Power	DC 40KW-240KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
AD Screen	22-Inch
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	1150*760*1900
Package size	1220*860*2030
net weight	250KG
gross weigh	290KG

# DC 40KW-360KW double guns



Military grade materials  
IP54 protection level  
RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP  
7 inch touch screen  
Home use or commercial use is optional  
Eight types of safety protection systems  
Floor mounted



## Product parameter

Item	Details
Power	DC 40KW-360KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
AD Screen	32-Inch
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	800*600*1800
Package size	1150*900*2000
net weight	250KG
gross weigh	290KG

# DC40KW-160KW double guns



- Military grade materials
- IP54 protection level
- RFID/Plug and play/App/Blue teeth/WiFi/4G/OCPP
- 7 inch touch screen
- Home use or commercial use is optional
- Eight types of safety protection systems
- Floor mounted



## Product parameter

Item	Details
Power	DC40KW-160KW
Input Voltage	AC(400V±20% 3 Phase -
Rated output voltage	DC150-1000V
Frequency	50-60Hz
Communication Protocol	OCPP 1.6J
HMI	7- Inch touch screen
Cable Length	5m
Charging method	4G/Ethernet/RFID etc
Connector Type	CCS1/CCS2/CHADEMO/GBT
Communication Protocol	OCPP 1.6J
Protection Level	IP54
Operating Temperature	~-30C to +60C
Product size	700*440*1650
Package size	1040*560*1730
net weight	120KG
gross weigh	160KG

# Certifications

Having been deeply engaged in the industry for many years, our company has obtained certification certificates issued by many authoritative certification bodies at home and abroad, relying on excellent product quality and a strict quality control system. These qualifications are not only a high recognition of our technical strength, but also a solid guarantee for providing customers with reliable products and professional services.



# JOINT VENTURE



The company has established a good relationship with many well-known companies in the industry. Through strong alliances and complementary advantages, the company makes full use of upstream supplier resources to provide customers with competitive solutions, products and services.


国家电网 STATE GRID  
 中国南方电网 CHINA SOUTHERN POWER GRID  
 CHINA TOWER 中国铁塔

中建一局  
 中国移动通信 CHINA MOBILE  
 中国电信 CHINA TELECOM  
 GREE 格力

CHNT  
 中国节能 CECEP  
 美的 Midea

云快充  
 碧桂园  
 小桔充电  
 JAC 江淮汽车

SEARI 上电科  
 BYD  
 大唐光伏能源 DATANG PHOTOVOLTAIC ENERGY  
 锦浪科技 GINLONG

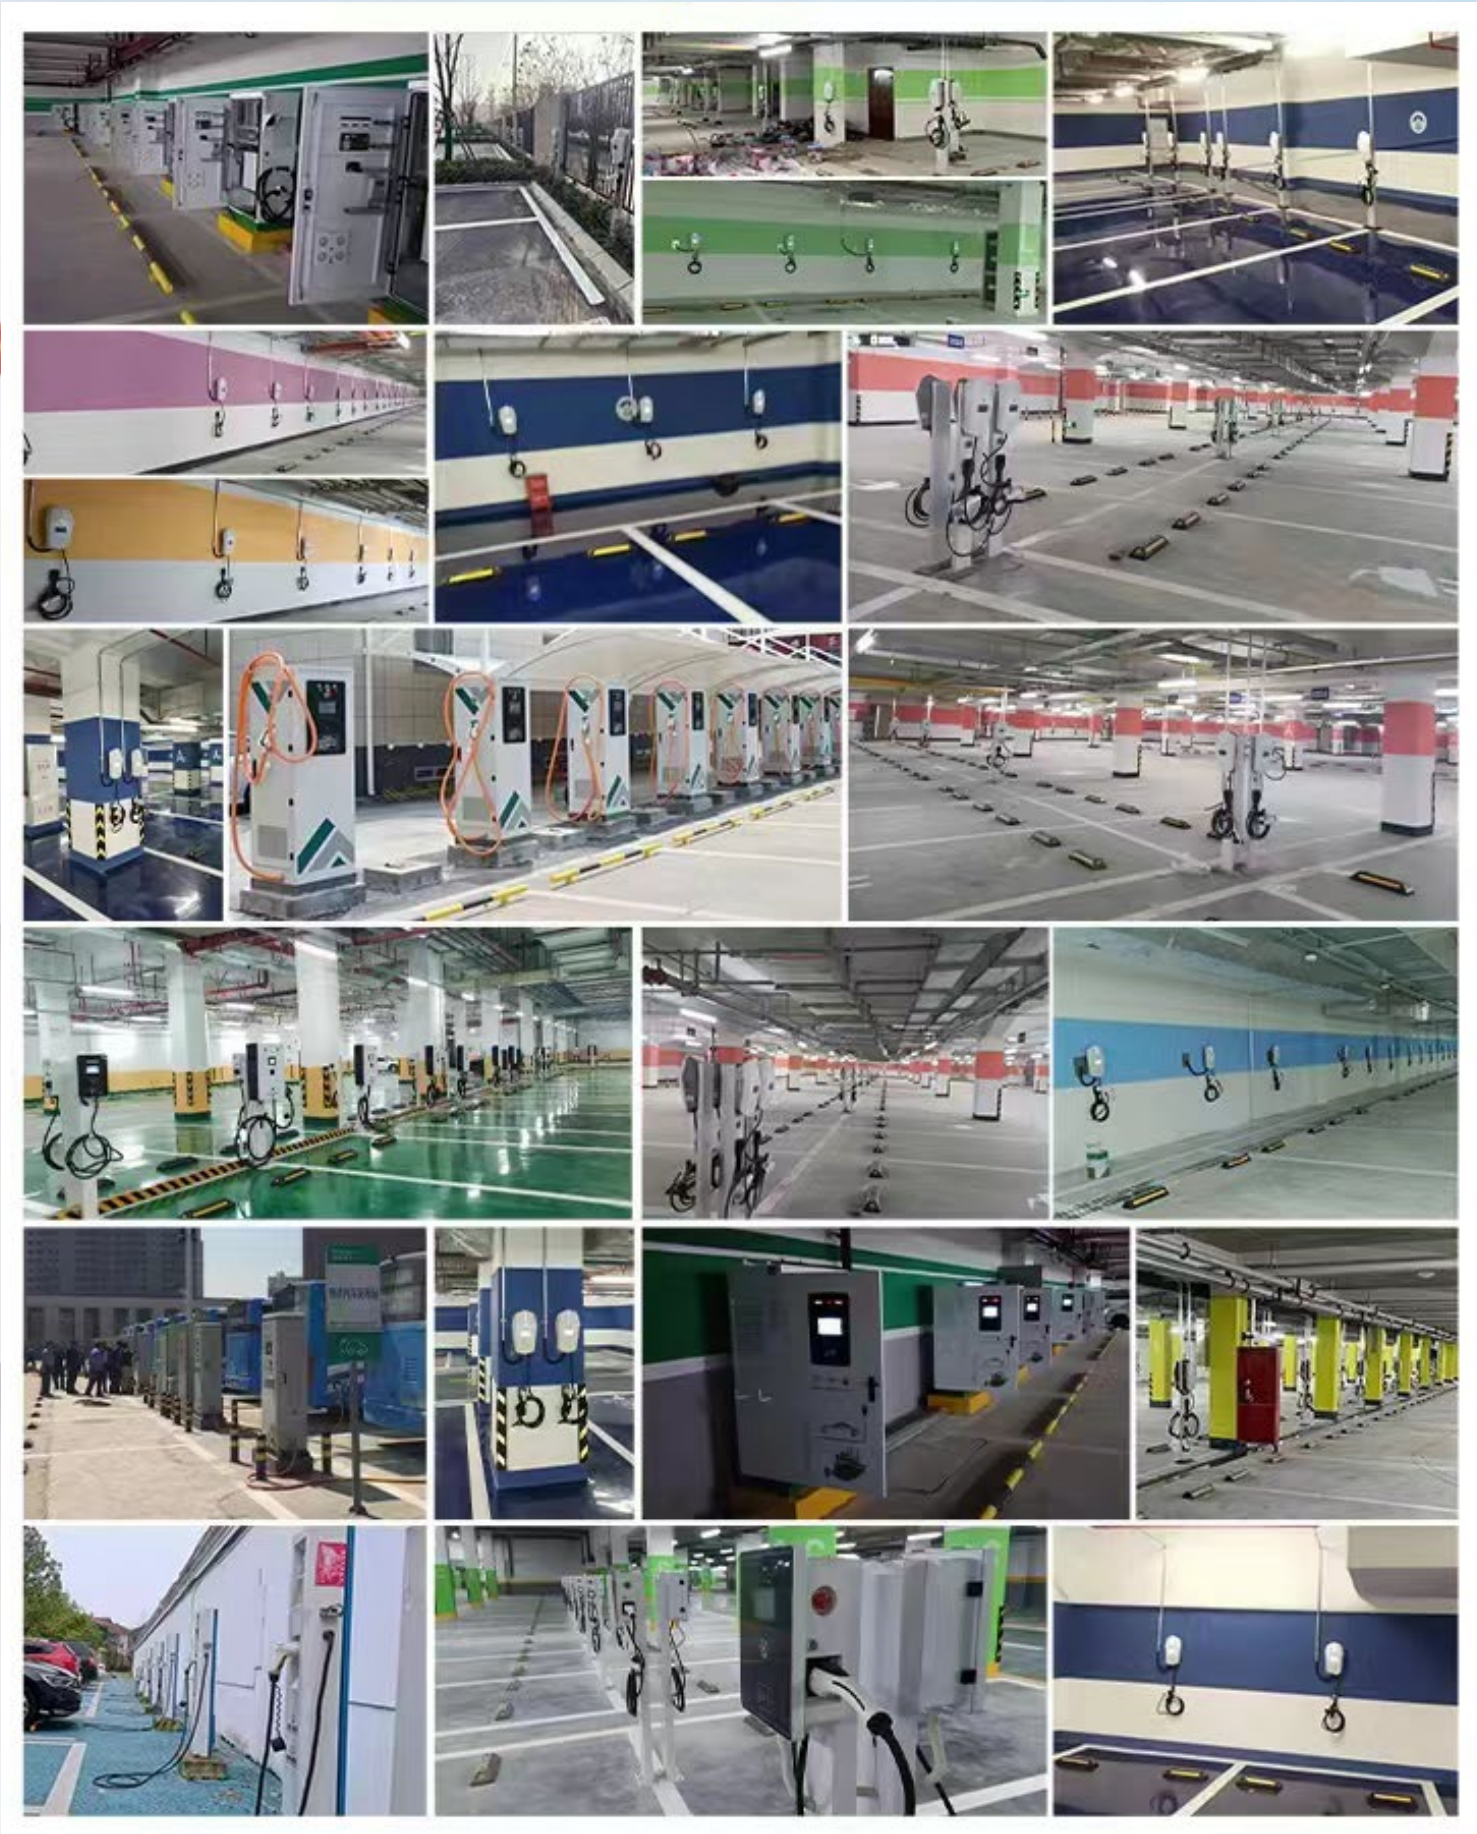

**Electric vehicle charging station**

**CONNECTED WORLD ENERGY**

**ENERGIZE THE WORLD**



## **Electric vehicle charging station manufacturing factory**

- ▶ Advanced technology
- ▶ Strict quality control
- ▶ Highly - skilled R & D team dedicated
- ▶ Providing top - notch products and services